



January 2025, Special Issue on AI 4 All- 2

# Advances in Deep Learning for Eye Disease Diagnosis: Applications, Challenges, and Future Directions

Mohammad Shojaeinia<sup>✉</sup>, Code ORCID: 0000-0002-2634-5328

Department of Health Information Technology and Management, School of Allied Medical Sciences, Shahid Beheshti University of Medical Science, Tehran, Iran, Shojaeinia.m@sbmu.ac.ir

Hamid Moghaddasi, Code ORCID: 0000-0002-5906-0329

Professor in Health information management and Medical Informatics, Department of Health Information Technology and Management, School of Allied Medical Sciences, Shahid Beheshti University of Medical Sciences, Tehran, Iran, Moghaddasi@sbmu.ac.ir

**Abstract** — Deep learning has emerged as a transformative technology in ophthalmology, addressing critical challenges in the diagnosis and management of eye diseases such as diabetic retinopathy (DR), glaucoma, age-related macular degeneration (AMD), and central serous chorioretinopathy (CSCR). These conditions, among the leading causes of preventable blindness, require accurate and timely detection, which is often limited by traditional diagnostic methods due to inefficiency and the complexity of interpretation. The goal of this study is to examine the applications of deep learning in the diagnosis of ophthalmic diseases and to help researchers gain a better understanding of recent advances in model development, identify challenges associated with widespread implementation of these models in real-world applications, and outline future research directions in this area. Methodologically, recent studies using convolutional neural networks (CNNs), vision transformers, and hybrid models demonstrate high diagnostic accuracy and potential for early disease detection. Applications extend beyond disease diagnosis to lesion segmentation, disease progression monitoring, and personalized treatment planning. Deep learning systems have demonstrated comparable or superior diagnostic performance to human experts in detecting diseases such as DR and glaucoma. Despite these advances, challenges remain, including limited generalizability, data bias, and the need for explainable AI models to foster clinical trust and adoption. Addressing these challenges through improved model transparency, diverse datasets, and ethical frameworks will be critical to integrating deep learning into routine ophthalmic practice. This review highlights the significant advances in deep learning-driven ophthalmology and outlines a path for future research to optimize its clinical implementation.



**Keywords**—Deep Learning, Ophthalmology, Artificial Intelligence, Medical Imaging, Eye disease.

## I. Introduction (Heading 1)

Eye diseases such as Diabetic retinopathy (DR), Glaucoma, Age-related macular degeneration (AMD), and Central serous chorioretinopathy (CSCR) are among the leading causes of preventable blindness on a global scale. The timely diagnosis and appropriate treatment of these conditions require precise data and advanced tools [32–33]. DR, a complication of diabetes, leads to swelling of retinal blood vessels, causing fluid and blood leakage into the retina [57]. AMD is a prevalent retinal disorder that primarily affects older adults. It is characterized by the deterioration of the macula, leading to symptoms such as blurred vision, dark spots in the central vision, and blind spots. It is imperative to differentiate between the dry and wet forms of AMD to facilitate timely intervention. CSCR is an idiopathic and often unilateral macular disease, characterized by the detachment of the neurosensory retina due to subretinal fluid (SRF) accumulation [58–60]. It is noteworthy that this condition frequently coexists with Pigment epithelium detachment (PED), and primarily affects individuals aged 30 to 50 [61].

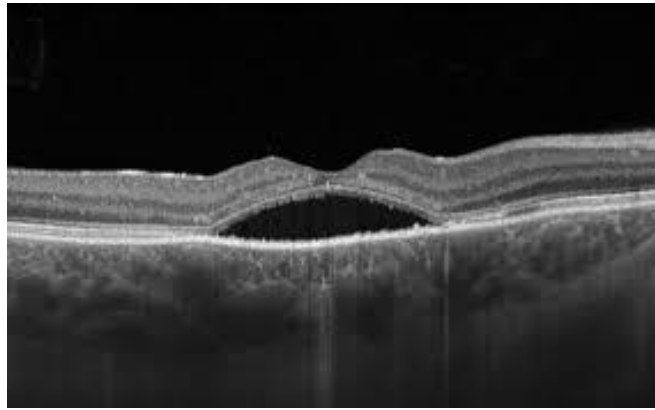


Fig 1. CSCR on OCT images.

A comprehensive list of other eye diseases includes, but is not limited to, the following: myopia, hyperopia, keratoconus, choroidal neovascularization (CNV), uveitis, macular edema, macular hole, ischemic optic neuropathy, optic neuritis, ocular tumors such as choroidal melanoma or metastatic tumors, and various choroidal spectrum disorders.

Typically, the diagnosis of these conditions involves a combination of clinical examinations, patient history analysis, and image interpretation. Conventional diagnostic methods are characterized by several limitations. They are subjective, time-consuming, and rely predominantly on manual interpretation of images. These methods frequently exhibit deficiencies in terms of efficiency due to their inability to discern subtle variations in imaging characteristics among different diseases. Additionally, they are susceptible to variations in interpretation among different observers.

In recent years, deep learning has demonstrated significant potential in processing vast amounts of complex data, such as retinal fundus image and 3D optical coherence tomography (OCT) data, to uncover disease patterns and predict treatment outcomes [39].

Deep learning, a subset of machine learning, employs multilayer neural networks to simulate complex decision-making processes analogous to those of the human brain [1]. This approach has demonstrated notable efficacy in various domains of computer vision, including the automated diagnosis of ocular diseases [2, 62].

For instance, in 2016, researchers at Google Brain developed a deep learning system capable of diagnosing diabetic retinopathy (DR) and diabetic macular edema (DME) from retinal images with considerable accuracy [3]. This milestone signified a substantial breakthrough in the implementation of artificial intelligence (AI) in the domain of ophthalmology. In 2018, the FDA approved the first AI-based diagnostic system for DR screening, thereby establishing a foundation for subsequent advancements in AI-related ophthalmological research [4].

In light of the rapid proliferation of artificial intelligence (AI) applications, particularly those employing deep learning techniques, in the domain of ophthalmology, this review aims to explore the applications, achievements, and challenges of AI in the diagnosis of ocular diseases. The objective is to delineate a clear research trajectory for future endeavors in this field.

## II. Methodology

This review examines the use of deep learning in ophthalmology. A comprehensive search was conducted on major databases, including PubMed, Scopus, and IEEE, yielding a collection of English-language articles relevant to the subject. The search terms encompassed a combination of Deep Learning, Ophthalmology, AI, Eye Care, Medical Imaging, and Eye Disease. The search timeframe focused on recent and relevant studies from the past decade, emphasizing those employing deep learning methods in ophthalmology using imaging data, particularly OCT and fundus imaging. The inclusion criteria encompassed studies utilizing deep learning techniques in ophthalmology, while the exclusion criteria omitted studies not employing artificial intelligence or deep learning algorithms specifically, as well as editorials and anecdotal case reports lacking empirical validation. Data extracted from each study included author names, publication year, journal or conference details, types of deep learning algorithms (e.g., convolutional neural networks [CNNs], transfer learning, hybrid models), data sources, imaging modalities, dataset sizes, performance metrics (e.g., sensitivity, specificity, accuracy, area under the curve [AUC], and F1 score), preprocessing techniques, model architectures, training methods, and identified challenges or limitations. A narrative analysis was conducted to interpret the findings, thereby providing a comprehensive overview of the current landscape of deep learning applications in ophthalmology. A comparative analysis of the studies was conducted based on several key metrics, including diagnostic performance, innovation in model design, imaging techniques employed, and clinical applicability. Special attention was given to enhancing model generalizability and outlining future research directions to optimize the application of deep learning in ophthalmology [48–52].

## III. Findings

Advancements in computational power, open-source platforms, neural network architectures, and training processes on large labeled datasets such as ImageNet have enhanced the hierarchical representation capabilities, scalability, and interpretability of deep learning models. These advancements, in conjunction with access to extensive datasets (e.g., electronic medical records, imaging data, biosensor data, and genetic sequences), have facilitated the remarkable performance of artificial intelligence (AI) in various domains of ophthalmology. This includes the diagnosis and treatment of conditions such as age-related macular degeneration (AMD), glaucoma, and retinopathy of prematurity [17–20, 33]. The increasing number of patients, shortage of ophthalmologists, and limited medical resources; inefficient healthcare workflows; escalating care costs; and occasional diagnostic

inaccuracies underscore the growing need for the development of artificial intelligence (AI) models in ophthalmology. The efficacy of deep learning models in the diagnosis of retinal diseases, including DR, AMD, and retinal vascular occlusions, as well as neurological, vascular, and corneal conditions, has been demonstrated. Examples include glaucoma prediction and classification using OCT-based retinal nerve fiber layer thickness estimation [14, 17–20, 34–35, 40], prognosis prediction [21], and precise analysis of imaging modalities like OCT, Optical coherence tomography angiography (OCTA) [28], Colored Fundus Photography (CFP) [41], Fluorescein angiography (FA), Fundus autofluorescence (FAF), Indocyanine green angiography (ICGA), and multimodal imaging using CNNs [43–44], vision transformers [29–30], and advanced hybrid models [31].

Applications also extend to the classification of cataracts [37] and differential diagnosis (e.g., PCV vs. N-AMD) [16–17], treatment efficacy evaluation [26], disease grading [16], lesion segmentation and localization [27–38], disease pattern recognition, biomarker identification [22], monitoring disease progression and recurrence, robotic surgery [24–25], tele-ophthalmology [23], personalized treatment protocols [45], clinical decision support systems [46], surgical outcome prediction systems, workflow optimization, and generating synthetic datasets for rare diseases using GANs [42].

Advanced architectures such as U-Net and Capsule Networks have attained Dice coefficients of up to 0.965 for SRF segmentation, thereby enabling precise identification of affected areas. Nevertheless, challenges persist, including variability in image quality and the substantial expense associated with lesion annotation, which hinders the widespread implementation of these methods [68]. The employment of CNN models, such as VGG-19, has led to the attainment of accuracies that have surpassed 97% in the differentiation of CSCR from normal cases [69].

Deep learning methodologies in ophthalmology encompass convolutional neural networks (CNNs) for image processing, vision transformers for specific vision tasks, graph networks for analyzing neural structures, multitask learning for simultaneous diagnosis (e.g., diabetic retinopathy [DR], glaucoma, age-related macular degeneration [AMD], reinforcement learning for glaucoma diagnosis and treatment, one-shot learning for rare diseases, and multimodal approaches.

In addition, recurrent neural networks (RNNs) and long short-term memory (LSTM) networks have been used to analyze sequential data, such as longitudinal imaging studies or time series data, improving the ability to track disease progression over time. GANs have been particularly effective in synthesizing realistic eye images for data augmentation and addressing class imbalances in datasets. Reinforcement learning approaches show promise in optimizing treatment strategies and surgical planning, while RNNs and LSTMs help model temporal dependencies in patient data for more nuanced analysis. CNNs have layers that perform convolution operations to extract hierarchical features from input images. CNNs have been successfully applied to spatial pattern extraction, key feature segmentation (e.g., SRF and PED), and the integrated use of multimodal images to enhance diagnostic accuracy. CNN architectures typically include convolutional layers, pooling layers for dimensionality reduction, and fully connected layers for classification or regression [Figure 1].

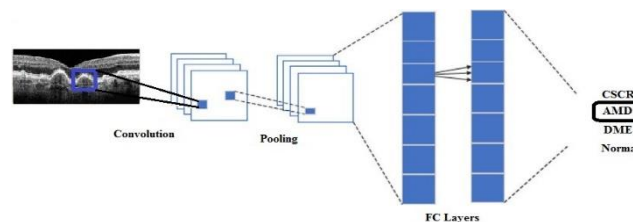


Fig 2. Typical architecture of CNN.

The training process of CNN models involves the division of data into training and test sets, ensuring no overlap between them. The model training and validation process employs a suitable loss function for binary classification tasks, such as binary cross-entropy. The training process utilizes an optimizer, such as Adam or SGD, to facilitate gradient descent. Additionally, learning rates are adjusted to achieve a balance between convergence speed and model performance. The implementation of early stopping is a crucial aspect of the training process, as it serves to prevent overfitting by monitoring the validation loss.

Research has demonstrated that CNNs consistently achieve high accuracy in diagnosing DR [3], while vision transformers [Figure 2] have been shown to excel in identifying specific conditions like glaucoma [63].

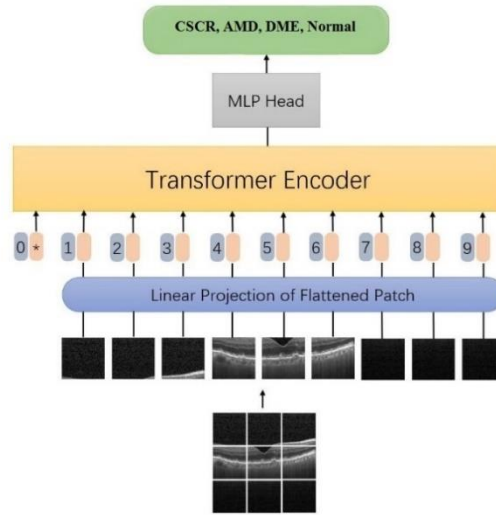


Fig 3. Typical architecture of Vision Transformer.

Vision Transformers (ViTs) are a class of models that apply the principles of transformer architecture, originally designed for natural language processing (NLP), to computer vision tasks. These models treat images as sequences of patches and utilize self-attention mechanisms to capture long-range dependencies and global context within images. This approach enables ViTs to learn a general representation of data, as opposed to merely a set of labels [70-71]. This is achieved by employing self-attention to embed information globally across the image, representing a departure from the local receptive fields typically utilized in CNNs [72]. Vision Transformers (ViTs) have emerged as a state-of-the-art architecture for image recognition tasks, playing a significant role in digital health applications. It is noteworthy that medical images constitute the preponderance of data in the field of digital medicine, comprising approximately 90% of the total data [73]. ViTs have demonstrated notable efficacy in a range of digital health applications, including image segmentation, classification, detection, prediction, reconstruction, synthesis, and telehealth tasks such as report generation and security [74]. In comparison to CNNs, ViTs offer enhanced interpretability and enable parallel processing, thereby reducing computational time. Nevertheless, these models are more resource-intensive and require larger training datasets. The integration of generative models, such as GPT-4, into clinical decision-support systems has been demonstrated to enhance diagnostic precision and therapeutic decision-making. The performance of most models has been evaluated using metrics such as accuracy, precision, recall (sensitivity), specificity, F1 score, AUC-ROC, confusion matrix analysis, intersection over union (IoU), and Dice similarity coefficient (DSC). The analysis of optical coherence tomography (OCT) images by deep learning models holds promise for the detection of microscopic changes occurring in the early stages of diseases. This capability is particularly critical in conditions such as age-related macular degeneration (AMD) and glaucoma. Automated systems that are powered by deep learning have the capacity to process thousands of eye images in a relatively brief period of time. This capability offers a significant advantage for medical centers that handle a high volume of cases. The diagnostic accuracy of deep learning models in identifying diseases, such as diabetic retinopathy and glaucoma, has been shown to be comparable to, and in some cases superior to, that of physicians [3]. While experienced clinicians can make accurate diagnoses, their assessments are susceptible to factors such as fatigue, time constraints, and human errors.

A salient attribute of deep learning models is their capacity for continual enhancement of performance through the incorporation of novel data and periodic updates. Deep learning-based methods hold particular promise in promoting equitable healthcare delivery in regions with limited access to specialists. Furthermore, the integration of deep learning with diverse datasets, encompassing images and clinical data, the development of explainable algorithms, and the enhancement of data quality can contribute to an increase in the reliability and clinical acceptance of these models. The Table 1 presents a list of studies that have demonstrated the highest diagnostic performance.

Table 1. Studies with the highest diagnostic performance

Ref	Objective	Model	Modalities	Accuracy	Sensitivity	Specificity	AUC
3	DR diagnosis	CNN	CFP	-	0.903	0.985	0.990
64	CNV, DME, AMD diagnosis	CNN, TL (Transfer Learning)	OCT	0.966	0.978	0.974	0.999
34	AMD diagnosis	CNN	OCT	0.945	0.945	0.920	0.992
35	DR diagnosis	CNN	OCT, CFP	-	0.872	0.907	-
65	Glaucoma Diagnosis	CNN, TL (Transfer Learning)	OCT, CFP	0.957	0.947	0.949	0.978

Notwithstanding the noteworthy advantages of deep learning, numerous challenges persist, including limited generalizability, the necessity for extensive, diverse, and adequately labeled datasets, various biases (e.g., feature selection bias, model complexity, training bias, data imbalance, and evaluation metric selection bias) [55], and a paucity of model transparency [12-13].

Discrepancies in imaging device settings and scan protocols may result in variations in image appearance, thereby complicating the development of generalizable models. The absence of a standardized dataset can lead to bias, diminish the generalizability of the model, and compromise its performance in real-world scenarios. The dearth of exhaustive clinical data, compounded by the presence of discrepancies in lesion annotation, further complicates the training process, as different annotators may interpret the same data differently.

These challenges render the development process—comprising data collection, labeling, and model training—both time- and resource-intensive.

Ensuring the confidentiality of sensitive medical data is another significant concern. Additionally, regulatory frameworks for the deployment of such systems are still in a state of development and require refinement. Consequently, future research should prioritize the establishment of legal and ethical frameworks to ensure the safe and responsible use of these technologies. It is imperative to deliberate on concerns such as patient privacy, data security, and algorithmic bias. Ensuring fairness, transparency, and accountability in the development and deployment of deep learning models is essential for responsible innovation in healthcare. This review underscores the immense potential of deep learning in ophthalmology to improve disease diagnosis, prediction, and treatment.

Nevertheless, it is imperative to confront the prevailing challenges and capitalize on the nascent capabilities of deep learning to ensure the optimal utilization of this technology.

#### IV. Discussion and Conclusion

Deep learning has emerged as a significant innovation in the field of ophthalmology, offering a novel approach to medical analysis. This technology has been shown to facilitate more precise diagnoses, advanced disease prognostication, and enhanced clinical decision-making processes.

This technology plays a pivotal role in transforming traditional methods, from analyzing various ophthalmic images to predicting disease progression. Recent advancements in deep learning methodologies have had a substantial impact on various applications, particularly in the domain of ophthalmological disease diagnosis.

The U-Net deep learning architecture, with its encoder-decoder structure, has demonstrated proficiency in image segmentation tasks by effectively capturing both global and local contextual information. More advanced deep learning architectures, such as Capsule Networks, offer advantages in handling the spatial relationships and pose information of lesions, which may be beneficial for the precise segmentation of CSCR lesions. In the context of classification tasks, models such as ResNet, VGG, and DenseNet have been extensively utilized. The efficacy of deep networks based on ResNet, renowned for their residual connections, has been demonstrated in the training of deeper networks and the extraction of more complex features. This feat is achieved by effectively mitigating the vanishing gradient problem. DenseNet, characterized by its densely connected pattern, has been shown to enhance feature reuse and improve gradient flow, thereby increasing the model's learning capacity and generalizability. The selection of an optimal deep learning architecture is contingent upon factors including dataset size, the availability of computational resources, and the level of detail required.

The integration of clinical and imaging data in hybrid models has demonstrated the potential to enhance the prognosis of eye disease by providing customized insights for treatment and monitoring. Beyond the process of data integration, these hybrid models have the capacity to combine multiple machine-learning tasks. For instance, a CNN can be utilized to extract features from images, which are subsequently fed into classical classifiers such as SVMs or employed as input patches for Vision Transformers, thereby attaining superior performance in comparison to an all-in-one CNN model. However, challenges related to the generalizability and explainability of these models must be addressed to ensure their efficient and effective implementation in clinical settings.

A thorough review of the extant literature reveals that critical considerations in the domain of ophthalmic diagnosis employing deep learning include the quantity, diversity, and quality of images, as well as potential biases in the datasets. The efficacy of the diagnostic process is contingent on several factors, including the size of the dataset, its heterogeneity, and the optimization of pertinent algorithms [75]. Insufficient data can result in models that overfit the training data and perform inadequately on unseen data. Consequently, these models exhibit a deficiency in terms of their generalizability. This limitation is a salient impediment to the efficacy of clinical applications. Suboptimal image quality, variations in imaging parameters across devices, and demographic diversity can have a substantial impact on model performance. A model that demonstrates strong performance on one dataset may exhibit suboptimal performance on another due to these variations. Consequently, the development of models that are resilient to variations in image quality and acquisition parameters is imperative for the widespread clinical acceptance of these tools. In order to address these challenges, it is necessary to undertake a thorough examination of training and validation data, increase the size and diversity of datasets, implement effective training strategies, and design architectures that are resilient to noise and imaging artifacts. It is imperative to acknowledge that real-world images often contain noise and artifacts resulting from patient movement during imaging or limitations of the imaging devices. The efficacy of deep learning models is contingent upon their resilience to perturbations, which is essential for ensuring reliable diagnostic outputs. While preprocessing techniques have been demonstrated to aid in mitigating the impact of noise and artifacts, the model itself must be engineered to exhibit resilience to such variations [76-77]. Moreover, multicenter studies comprising diverse populations and imaging protocols are imperative to enhance the generalizability and robustness of deep learning models. The augmentation of training data can be facilitated by techniques such as transfer learning, domain adaptation, and synthetic data generation. A range of advanced techniques, including image augmentation, image fusion, generative adversarial networks (GANs), diffusion models, regularization strategies, and style transformation, have demonstrated efficacy in enhancing the quantity and variety of images within training datasets [78-80]. For instance, one study investigates the viability of employing multi-shot learning (FSL) with generative adversarial networks (GANs) to enhance the detection of rare retinal diseases through OCT.

In addition, RNNs and LSTMs offer opportunities to capture temporal patterns in disease progression, which could further improve diagnostic accuracy and decision making. Reinforcement learning has the potential to optimize personalized treatment



strategies and surgical interventions.

A prominent challenge in developing deep learning models in ophthalmology pertains to their interpretability, a crucial aspect for fostering trust between clinicians and AI-based models. Attention mechanisms, for instance, have the potential to assist clinicians in better understanding these models and making more informed therapeutic decisions. The absence of transparency and interpretability in these models hinders the evaluation of their decision-making processes and the identification of potential errors or biases, thereby impeding their acceptance and broader implementation. The incorporation of interpretability tools, such as Grad-CAM (based on heatmap analysis) [66] and SHAP, in CNNs, is crucial for elucidating the features critical to eye disease diagnosis. The employment of advanced architectures, such as Vision Transformers [67], which utilize self-attention mechanisms to capture long-range dependencies, has yielded notable success in various image recognition tasks, including disease detection and recurrence prediction, by providing more interpretable models. However, there is still a need to develop more advanced and efficient techniques to enhance the precision and transparency of model interpretations.

## References

- [1] Holdsworth J, Scapicchio & Mark. Deep learning. IBM. <https://www.ibm.com/topics/deep-learning>.
- [2] Priya R, Aruna P. A NEW EYENET MODEL FOR DIAGNOSIS OF DIABETIC RETINOPATHY. *Applied Artificial Intelligence*. 2013 Nov 26;27(10):924–40.
- [3] Gulshan V, Peng L, Coram M, Stumpe MC, Wu D, Narayanaswamy A, et al. Development and Validation of a Deep Learning Algorithm for Detection of Diabetic Retinopathy in Retinal Fundus Photographs. *JAMA*. 2016 Dec 13;316(22):2402.
- [4] Office of the Commissioner. U.S. Food and Drug Administration. 2018. FDA permits marketing of artificial intelligence-based device to detect certain diabetes-related eye problems. Available from: <https://www.fda.gov/news-events/press-announcements/fda-permits-marketing-artificial-intelligence-based-device-detect-certain-diabetes-related-eye>.
- [5] Honavar SG. Artificial intelligence in ophthalmology - Machines think! *Indian Journal of Ophthalmology*. 2022 Mar 22;70(4):1075–9.
- [6] AbdelMaksoud E, Barakat S, Elmogy M. A computer-aided diagnosis system for detecting various diabetic retinopathy grades based on a hybrid deep learning technique. *Medical & Biological Engineering & Computing*. 2022 May 11;60(7):2015–38.
- [7] Lim JI, Regillo CD, Sadda SR, Ipp E, Bhaskaranand M, Ramachandra C, et al. Artificial Intelligence Detection of Diabetic Retinopathy. *Ophthalmology Science*. 2023 Mar;3(1):100228.
- [8] Mutawa AM, Al-Sabti K, Raizada S, Sruthi S. A Deep Learning Model for Detecting Diabetic Retinopathy Stages with Discrete Wavelet Transform. *Applied Sciences*. 2024 May 23;14(11):4428.
- [9] Kandan P, Aruna P. A New EYENET Model for Diagnosis of Age-Related Macular Degeneration. In: *Advances in Computational Intelligence and Robotics* [Internet]. IGI Global; 2016 [cited 2024 Dec 3]. p. 422–40. Available from: <https://objects.scraper.bibcitation.com/user-pdfs/2024-12-03/834717a3-4ba4-4d2f-a9a9-f508c245ebe9.pdf>.
- [10] Larkin F, He M. Embracing generative AI in ophthalmology. *British Journal of Ophthalmology*. 2024 Sep 20;108(10):1333–4.
- [11] Topol EJ. High-performance medicine: the convergence of human and artificial intelligence. *Nature Medicine*. 2019 Jan;25(1):44–56.
- [12] Wang S, He X, Jian Z, Li J, Xu C, Chen Y, et al. Advances and prospects of multi-modal ophthalmic artificial intelligence based on deep learning: a review. *Eye and Vision*. 2024 Oct 1;11(1).
- [13] Ting DSW, Pasquale LR, Peng L, Campbell JP, Lee AY, Raman R, et al. Artificial intelligence and deep learning in ophthalmology. *British Journal of Ophthalmology*. 2018 Oct 25;103(2):167–75.
- [14] Rahimy E. Deep learning applications in ophthalmology. *Curr Opin Ophthalmol*. 2018 May;29(3):254–260. doi: 10.1097/ICU.0000000000000470. PMID: 29528860.
- [15] Burlina P, Pacheco KD, Joshi N, Freund DE, Bressler NM. Comparing humans and deep learning performance for grading AMD: A study in using universal deep features and transfer learning for automated AMD analysis. *Computers in Biology and Medicine*. 2017 Mar;82:80–6.
- [16] Yuan MZ. Comparison of OCT and OCTA manifestations among untreated PCV, neovascular AMD, and CSC in Chinese population. *International Journal of Ophthalmology*. 2020 Jan 18;13(1):93–103.
- [17] Meriaudeau F. Machine Learning and Deep Learning approaches for Retinal Disease Diagnosis. *Procedia Computer Science*. 2018;135:2.
- [18] Dubey S, Dixit M. Applying Deep Learning and Computer Vision for Early Diagnosis of Eye Diseases. In: *Disease Prediction using Machine Learning, Deep Learning and Data Analytics* [Internet]. BENTHAM SCIENCE PUBLISHERS; 2024 [cited 2024 Dec 4]. p. 103–30. Available from: <https://doi.org/10.2174/9789815179125124010012>.
- [19] Sayres R, Hammel N, Liu Y. Artificial intelligence, machine learning and deep learning for eye care specialists. *Annals of Eye Science*. 2020 Jun;5:18–18.
- [20] Xu L, Asaoka R, Cao J, Murata H, Fujino Y, Yamanishi K. A Two-Phase Deep Learning Approach to Glaucoma Estimation Using Retinal Layers Thickness. *Research Square Platform LLC*; 2023 Aug. Available from: <https://doi.org/10.21203/rs.3.rs-3265280/v1>.
- [21] R R, K M, S M, R V. A Deep Learning Framework for Prediction of Retinal Disorders. *SSRN Electronic Journal*. 2020.
- [22] Saha S, Nassisi M, Wang M, Lindenberg S, kanagasingam Y, Sadda S, et al. Automated detection and classification of early AMD biomarkers using deep learning. *Scientific Reports*. 2019 Jul 29;9(1).
- [23] Balas M, Micieli JA, Wong JCY. Integrating AI with tele-ophthalmology in Canada: a review. *Canadian Journal of Ophthalmology*. 2024 Sep.

- [24] Alafaleq M. Robotics and cybersurgery in ophthalmology: a current perspective. *Journal of Robotic Surgery*. 2023 Jan 13;17(4):1159–70.
- [25] De Smet MD, Naus GJL, Faridpooya K, Mura M. Robotic-assisted surgery in ophthalmology. *Current Opinion in Ophthalmology*. 2018 May;29(3):248–53.
- [26] Promising Artificial Intelligence–Machine Learning–Deep Learning Algorithms in Ophthalmology. *Asia-Pacific Journal of Ophthalmology*. 2019 Sep;8(5):417.
- [27] Vadduri M, Kuppusamy P. Enhancing Ocular Healthcare: Deep Learning-Based Multi-Class Diabetic Eye Disease Segmentation and Classification. *IEEE Access*. 2023;11:137881–98.
- [28] Pourjavan S, Gouverneur F, Macq B, Van Drooghenbroeck T, De Potter P, Boschi A, et al. Advanced Analysis of OCT/OCTA Images for Accurately Differentiating Between Glaucoma and Healthy Eyes Using Deep Learning Techniques. *Clinical Ophthalmology*. 2024 Nov; Volume 18:3493–502.
- [29] Yaraghi S, Khatibi T. Keratoconus disease classification with multimodel fusion and vision transformer: a pretrained model approach. *BMJ Open Ophthalmology*. 2024 Apr;9(1):e001589.
- [30] Yang Y, Cai Z, Qiu S, Xu P. Vision transformer with masked autoencoders for referable diabetic retinopathy classification based on large-size retina image. *PLOS ONE*. 2024 Mar 6;19(3):e0299265.
- [31] Zhang Y, Li Z, Nan N, Wang X. TranSegNet: Hybrid CNN-Vision Transformers Encoder for Retina Segmentation of Optical Coherence Tomography. *Life*. 2023 Apr 10;13(4):976.
- [32] Singh A, Kim W. Detection of diabetic blindness with Deep-Learning. In: 2020 IEEE International Conference on Bioinformatics and Biomedicine (BIBM) [Internet]. IEEE; 2020 [cited 2024 Dec 4]. p. 2440–7. Available from: <https://doi.org/10.1109/bibm49941.2020.9313392>.
- [33] Moshfeghi DM, Trese MT. Reducing Blindness Resulting from Retinopathy of Prematurity Using Deep Learning. *Ophthalmology*. 2021 Jul;128(7):1077–8.
- [34] De Fauw J, Ledsam JR, Romera-Paredes B, Nikolov S, Tomasev N, Blackwell S, et al. Clinically applicable deep learning for diagnosis and referral in retinal disease. *Nature Medicine*. 2018 Aug 13;24(9):1342–50.
- [35] Abramoff MD, Lavin PT, Birch M, Shah N, Folk JC. Pivotal trial of an autonomous AI-based diagnostic system for detection of diabetic retinopathy in primary care offices. *npj Digital Medicine*. 2018 Aug 28;1(1).
- [36] Sheikh A, Pradhan J, Dhuriya A, Pal AK. Medical Image Fusion Using Deep Learning. In: *Deep Learning for Biomedical Data Analysis*. Cham: Springer International Publishing; 2021. p. 129–52. Available from: [https://doi.org/10.1007/978-3-030-71676-9\\_6](https://doi.org/10.1007/978-3-030-71676-9_6).
- [37] Francisco Santos D. Advancing Eye Care: Cataract Classification through Deep Learning [Internet]. Institute of Electrical and Electronics Engineers (IEEE); 2023 Oct [cited 2024 Dec 4]. Available from: <https://doi.org/10.36227/techrxiv.24311374>.
- [38] Luo X, Peng L, Ke Z, Lin J, Yu Z. PA-Net: A Hybrid Architecture for Retinal Vessel Segmentation. *Pattern Recognition*. 2024 Dec;111254.
- [39] Hosni Mahmoud H. RETRACTED: Diabetic Retinopathy Progression Prediction Using a Deep Learning Model. *Axioms*. 2022 Nov 4;11(11):614.
- [40] Maryam Shahid, Dr. Zubair Saleem, Malik TG, Dr. Muhammad Farqaleet. Comparison of changes in retinal nerve fiber layer thickness and intraocular pressure between glaucoma and non-glaucoma patients after phacoemulsification. *Pakistan Journal of Medical Sciences*. 2022 Nov 12;39(1).
- [41] Coskunuzer B, Ahmed F. Topo-Net: Retinal Image Analysis with Topological Deep Learning. Elsevier BV; 2024. Available from: <https://doi.org/10.2139/ssrn.4725148>.
- [42] Masayoshi K, Katada Y, Ozawa N, Ibuki M, Negishi K, Kurihara T. Deep Learning Segmentation of Non-perfusion Area from Color Fundus Images and AI-generated Fluorescein Angiography. Research Square Platform LLC; 2024 Jan. Available from: <https://doi.org/10.21203/rs.3.rs-3871406/v1>.
- [43] M.S A, B V, K S, Kawatra S, Vaishnav A. Detection of Choroidal neovascularization (Cnv) in Retina Oct Images Using Vgg16 and Densenet Cnn. Research Square Platform LLC; 2021 Apr. Available from: <https://doi.org/10.21203/rs.3.rs-360517/v1>.
- [44] Li X, Zhou Y, Wang J, Lin H, Zhao J, Ding D, et al. Multi-Modal Multi-Instance Learning for Retinal Disease Recognition. In: *Proceedings of the 29th ACM International Conference on Multimedia*. New York, NY, USA: ACM; 2021. Available from: <https://doi.org/10.1145/3474085.3475418>.
- [45] Galić I, Habijan M. Deep Learning in Medical Image Analysis for Personalized Medicine. In: 2023 International Symposium ELMAR. IEEE; 2023. p. 207–12. Available from: <https://doi.org/10.1109/elmar59410.2023.10253934>.
- [46] Suguna M, Thiagarajan P. Deep learning applications in ophthalmology - computer-aided diagnosis. In: *Deep Learning in Medical Image Processing and Analysis*. Institution of Engineering and Technology; 2023. p. 237–58. Available from: [https://doi.org/10.1049/pbhe059e\\_ch15](https://doi.org/10.1049/pbhe059e_ch15).
- [47] Subin PG, Kannan PM. Multiple Eye Disease Detection using Hybrid Adaptive Mutation Swarm Optimization and RNN. *International Journal of Advanced Computer Science and Applications*. 2022;13(9).
- [48] Grant, M. J., & Booth, A. (2009). A typology of reviews: An analysis of 14 review types and associated methodologies. *Health Information & Libraries Journal*, 26(2), 91-108. <https://doi.org/10.1111/j.1471-1842.2009.00848.x>.
- [49] Pautasso, M. (2013). Ten Simple Rules for Writing a Literature Review. *PLoS Computational Biology*, 9(7), e1003149. <https://doi.org/10.1371/journal.pcbi.1003149>
- [50] Green, B. N., Johnson, C. D., & Adams, A. (2006). Writing narrative literature reviews for peer-reviewed journals: Secrets of the trade. *Journal of Chiropractic Medicine*, 5(3), 101-117. [https://doi.org/10.1016/S0899-3467\(07\)60142-6](https://doi.org/10.1016/S0899-3467(07)60142-6).

- [51] Cronin, P., Ryan, F., & Coughlan, M. (2008). Undertaking a literature review: A step-by-step approach. *British Journal of Nursing*, 17(1), 38-43. <https://doi.org/10.12968/bjon.2008.17.1.28059>.
- [52] Kitchenham, B. (2004). *Procedures for Performing Systematic Reviews*. Keele, UK: Keele University. <https://www.inf.ufsc.br/~aldo.vw/kitchenham.pdf>.
- [53] Subakan C, Ravanelli M, Cornell S, Bronzi M, Zhong J. Attention Is All You Need In Speech Separation. In: ICASSP 2021 - 2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP). IEEE; 2021. p. 21–5. Available from: <https://doi.org/10.1109/icassp39728.2021.9413901>.
- [54] Mithe S. Deep Learning on Graphs using Graph Convolutional Networks. San Jose State University Library; Available from: <https://doi.org/10.31979/etd.yca4-fmqh>.
- [55] Tiwari A. Bias and Fairness in Machine Learning. *Front Matter*; 2017 Jul. Available from: <https://doi.org/10.59350/7tdcs-4q330>.
- [56] Chen L, Tseng VS, Tsung TH, Lu DW. A multi-label transformer-based deep learning approach to predict focal visual field progression. *Graefes's Archive for Clinical and Experimental Ophthalmology*. 2024 Feb 9;262(7):2227–35.
- [57] Cleland C. Artificial intelligence-supported diabetic retinopathy (a complication of diabetes, caused by high blood sugar levels damaging the back of the eye) screening in Tanzania. <http://isretn.com/>. 2023 Mar 2;
- [58] Spaide RF, Campeas L, Haas A, Yannuzzi LA, Fisher YL, Guyer DR, et al. Central Serous Chorioretinopathy in Younger and Older Adults. *Ophthalmology*. 1996 Dec;103(12):2070–80.
- [59] Song IS, Shin YU, Lee BR. Time-Periodic Characteristics in the Morphology of Idiopathic Central Serous Chorioretinopathy Evaluated by Volume Scan Using Spectral-Domain Optical Coherence Tomography. *American Journal of Ophthalmology*. 2012 Aug;154(2):366-375.e4.
- [60] van Rijssen TJ, van Dijk EHC, Yzer S, Ohno-Matsui K, Keunen JEE, Schlingemann RO, et al. Central serous chorioretinopathy: Towards an evidence-based treatment guideline. *Progress in Retinal and Eye Research*. 2019 Nov;73:100770.
- [61] Berger L, Bühler V, Yzer S. Central Serous Chorioretinopathy – an Overview. *Klinische Monatsblätter für Augenheilkunde*. 2021 Aug 20;238(09):971–9.
- [62] Ting DSW, Pasquale LR, Peng L, Campbell JP, Lee AY, Raman R, et al. Artificial intelligence and deep learning in ophthalmology. *British Journal of Ophthalmology*. 2018 Oct 25;103(2):167–75.
- [63] Chincholi F, Koestler H. Transforming glaucoma diagnosis: transformers at the forefront. *Frontiers in Artificial Intelligence*. 2024 Jan 15;7.
- [64] Kermany DS, Goldbaum M, Cai W, Valentim CCS, Liang H, Baxter SL, et al. Identifying Medical Diagnoses and Treatable Diseases by Image-Based Deep Learning. *Cell*. 2018 Feb;172(5):1122-1131.e9.
- [65] Latif J, Tu S, Xiao C, Ur Rehman S, Imran A, Latif Y. ODGNet: a deep learning model for automated optic disc localization and glaucoma classification using fundus images. *SN Applied Sciences*. 2022 Mar 10;4(4).
- [66] Aoyama Y, Maruko I, Kawano T, Yokoyama T, Ogawa Y, Maruko R, et al. Diagnosis of central serous chorioretinopathy by deep learning analysis of en face images of choroidal vasculature: A pilot study. *PLOS ONE*. 2021; 16(6): e0244469.
- [67] Kitzmann, A. S., Pulido, J. S., Diehl, N. N., Hodge, D. O. & Burke, J. P. The incidence of central serous chorioretinopathy in Olmsted County, Minnesota, 1980–2002. *Ophthalmology* 115, 169–173. <https://doi.org/10.1016/j.ophtha.2007.02.032> (2008).
- [68] de Moura J, Novo J, Ortega M, Barreira N, Penedo MG. Automated Segmentation of the Central Serous Chorioretinopathy fluid regions using Optical Coherence Tomography Scans. In: 2021 IEEE 34th International Symposium on Computer-Based Medical Systems (CBMS). IEEE; 2021. p. 1–6. Available from: <http://dx.doi.org/10.1109/cbms52027.2021.00008>.
- [69] Nelson B, Pandiyapallil Abdul Khadir H, Odattil S. Detection of CSR from Blue Wave Fundus Autofluorescence Images using Deep Neural Network Based on Transfer Learning. *International journal of electrical and computer engineering systems*. 2023; 14(3):277–84.
- [70] Acharya, Akruti. “Introduction to Vision Transformers (ViT).” *Encord Blog*, September 11, 2023. <https://encord.com/blog/vision-transformers/>.
- [71] Inuwa, Mobarak. “Introduction to Vision Transformers (ViT).” *Analytics Vidhya*, May 31, 2023. <https://www.analyticsvidhya.com/blog/2023/05/introduction-to-vision-transformers-vit>.
- [72] Boesch, Gaudenz. “Vision Transformers (ViT) in Image Recognition: Full Guide.” *viso.ai*, November 25, 2023. <https://viso.ai/deep-learning/vision-transformer-vit/>.
- [73] Bhalerao, Chinmay. “Vision Transformer: An Introduction.” *Built In*, December 14, 2023. <https://builtin.com/articles/vision-transformer>.
- [74] Al-hammuri, Khalid, Fayez Gebali, Awos Kanan, and Ilamparithi Thirumarai Chelvan. “Vision Transformer Architecture and Applications in Digital Health: A Tutorial and Survey.” *Visual Computing for Industry, Biomedicine, and Art* 6, no. 1 (July 10, 2023). <https://doi.org/10.1186/s42492-023-00140-9>.
- [75] Althnian A, AlSaeed D, Al-Baity H, Samha A, Dris AB, Alzakari N, et al. Impact of Dataset Size on Classification Performance: An Empirical Evaluation in the Medical Domain. *Applied Sciences*. 2021; 11(2):796.
- [76] Khan A, Pin K, Aziz A, Han JW, Nam Y. Optical Coherence Tomography Image Classification Using Hybrid Deep Learning and Ant Colony Optimization. *Sensors*. 2023; 26;23(15):6706.
- [77] Xu J, Shen J, Wan C, Yan Z, Zhou F, Zhang S, et al. An Automatic Image Processing Method Based on Artificial Intelligence for Locating the Key Boundary Points in the Central Serous Chorioretinopathy Lesion Area. *Computational Intelligence and Neuroscience*. 2023 Jan;2023(1).
- [78] Shorten C, Khoshgoftaar TM. A survey on Image Data Augmentation for Deep Learning. *Journal of Big Data*. 2019; 6(1).
- [79] James AP, Dasarthy BV. Medical image fusion: A survey of the state of the art. *Information Fusion*. 2014; 19:4–19.



- [80] Liu M, Maiti P, Thomopoulos S, Zhu A, Chai Y, Kim H, et al. Style Transfer Using Generative Adversarial Networks for Multi-Site MRI Harmonization. Cold Spring Harbor Laboratory; 2021 Mar. Available from: <http://dx.doi.org/10.1101/2021.03.17.435892>.